


Environmental Enclosure

Enclosure for C-30ZX Ozone Monitor

The Environmental Enclosure is for dust and water protection in industrial and water bottling environments.

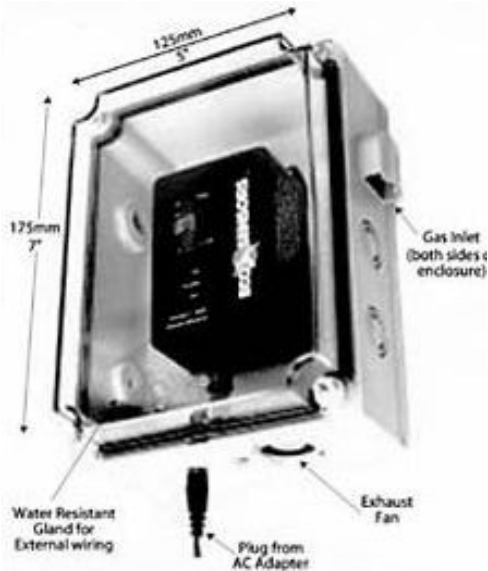

Features

- Protects Ozone Monitors from Dust, Dripping Water, etc.
- Rugged construction made of tough polycarbonate
- Clear polycarbonate gasketed cover
- Bottom mounted exhaust fan to maintain air flow
- Ideal for Water Bottling Plants
- Only for use with C-30ZX

Product ID: **EE-2**
Lead Time: **5 days**
Price: **\$220**

Specifications

Temperature and humidity range	5-35 degrees C and 10-95% relative humidity
Supply voltage required	12.5-30 VDC or 18-30 VAC 500 mA
Signal Output	0 - 2 VDC Standard (4-20 mA Optional)
Protection Classifications	IP 52. Enclosure is polycarbonate with 10% glass fill. Front cover is clear polycarbonate, hinged and gasketed.
Response time and warm-up	None
Size	5-in x 7-in x 3-in (WxHxD) 125-mm x 175-mm x 77-mm)
Weight	1.25-lbs (570 grams)

EE-2 Connections



Connections to the Circuit Board accessed by opening the front panel.