


# Inexpensive Ambient Ozone Sensor

## Low Cost Ozone Monitor

EZ-1X Ozone Monitor for ambient ozone detection. 0.02-0.14 PPM range. LED Readout.

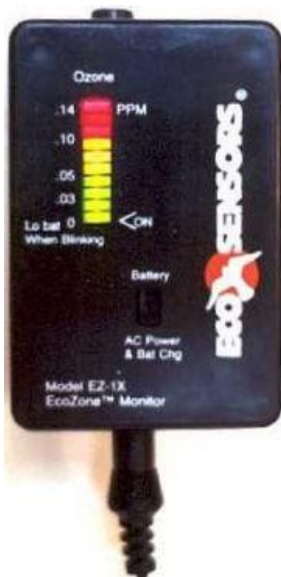

### Features

- Constantly monitors your work environment
- No installation required. Easily understood by non-technical personnel
- Lowest cost
- AC Adapter Included

Product ID: **EZ-1X**  
 In Stock: **Yes**  
 Price: **\$299**

### Specifications


Range	0.02-0.14 ppm
Bargraph Display	Normally green. Yellow at .05 ppm (caution). Red at .1 ppm (danger)
Response time	Within 10s of seconds of the ozone reaching the sensor
Measurement Principle	HMOS (heated metal oxide semiconductor) sensor
Size	85 x 35 x 60 mm (3.25 x 1.375 x 2.375 in)
Weight	154 grams (6 oz)
Power Requirements	12-24 VDC at 300 mA
Battery	Self-contained NiMH. Approximately 8 hour capacity. Recharged by AC adapter overnight

### EZ-1X Specifications




Printable information sheet on the EZ-1X. All specification & features are listed here.

### EZ-1X Component Diagram

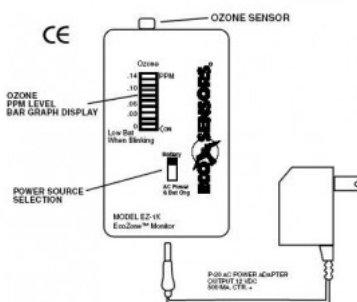

Included AC adapter (120V/60Hz only) easily plugs into the bottom of the ozone monitor.

### AC Adapter Type

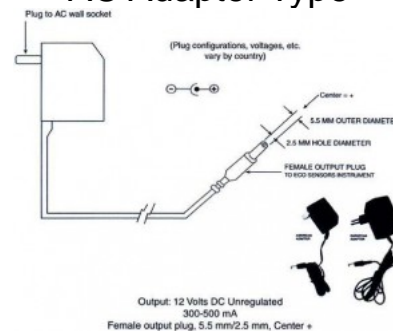

For overseas customers, the following Tech note show the type of plug required to connect to the AC Adapter.